


ARCHITECTURAL CHANNELS

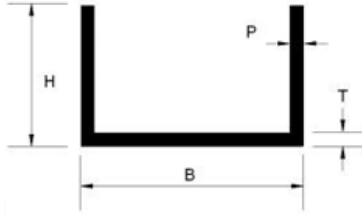

* DENOTES 1/2 COMMERCIAL TOLERANCE

i SPECIAL DIE NOTES, SEE WEBSITE FOR DETAILS

DIE #	DIMENSIONS				WEIGHT	
	B	H	P	T	LB/FT	KG/M
S-3204 i	0.500	0.500	0.062	0.062	0.101	0.150
S-3206 i	0.500	0.625	0.062	0.062	0.119	0.177
S-3400	0.500	0.750	0.125	0.125	0.258	0.384
S-2141 i	0.625	0.625	0.062	0.062	0.129	0.191
S-2207 i	0.625	0.750	0.062	0.062	0.146	0.218
S-5792	0.625	1.250	0.062	0.062	0.219	0.327
S-2255	0.750	0.500	0.125	0.125	0.221	0.329
S-7242 i	0.750	0.750	0.062	0.062	0.156	0.232
S-7577	0.750	0.750	0.125	0.125	0.295	0.439
S-2121 i	0.875	0.875	0.050	0.050	0.149	0.221
S-2138	1.000	0.500	0.125	0.125	0.258	0.384
S-9081	1.000	0.750	0.125	0.125	0.332	0.493
S-7243	1.000	1.000	0.125	0.125	0.405	0.603
S-3326	1.250	0.625	0.125	0.125	0.332	0.494
S-4647	1.260	1.145	0.125	0.125	0.486	0.723
S-7809	1.450	1.000	0.125	0.125	0.472	0.702
S-6855	1.500	0.500	0.125	0.125	0.332	0.493
S-2703	1.500	0.625	0.093	0.093	0.281	0.419
S-8943	1.500	0.750	0.063	0.063	0.212	0.316

DIE #	B	H	P	T	LB/FT	KG/M
S-25206	1.500	0.750	0.125	0.125	0.405	0.603
S-7791	1.500	1.000	0.125	0.125	0.479	0.713
S-7235	1.500	1.500	0.125	0.125	0.627	0.932
S-2122	1.875	0.875	0.050	0.050	0.208	0.309
S-3356	2.000	1.000	0.125	0.125	0.553	0.823
S-2440	2.500	1.312	0.188	0.188	1.053	1.567
S-4254	2.500	1.500	0.125	0.125	0.774	1.152
S-2752	3.000	1.000	0.125	0.125	0.701	1.043
S-3512	3.000	1.500	0.125	0.125	0.848	1.262
S-9709	3.000	1.500	0.187	0.187	1.241	1.847
S-3138	4.000	1.000	0.100	0.100	0.684	1.018