


UNEQUAL LEGS AMERICAN STANDARD

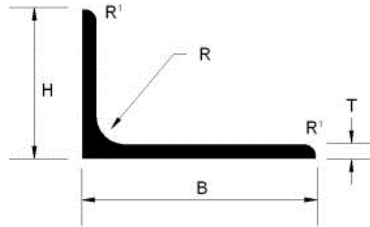

* DENOTES 1/2 COMMERCIAL TOLERANCE

i SPECIAL DIE NOTES, SEE WEBSITE FOR DETAILS

DIE #	DIMENSIONS					WEIGHT	
	B	H	T	R	R1	LB/FT	KG/M
S-15372	1.500	1.000	0.188	0.188	0.188	0.504	0.750
S-30336	1.500	1.250	0.125	0.125	0.100	0.386	0.574
S-10537	2.000	1.500	0.125	0.188	0.125	0.499	0.743
S-10538	2.000	1.500	0.188	0.188	0.125	0.736	1.095
S-28	2.000	1.500	0.250	0.188	0.125	0.960	1.428
S-26692	2.500	1.500	0.188	0.188	0.188	0.837	1.245
S-16470	2.500	1.500	0.188	0.250	0.125	0.853	1.270
S-25197	2.500	1.500	0.250	0.250	0.125	1.114	1.658
S-30	2.500	2.000	0.188	0.250	0.125	0.964	1.435
S-10539	2.500	2.000	0.250	0.250	0.125	1.261	1.877
S-10540	3.000	2.000	0.188	0.312	0.188	1.074	1.599
S-10541	3.000	2.000	0.250	0.312	0.188	1.408	2.095
S-10542	3.000	2.000	0.375	0.312	0.188	2.053	3.055
S-31	3.000	2.500	0.250	0.313	0.250	1.542	2.295
S-26693	3.500	1.500	0.250	0.250	0.125	1.409	2.097
S-10543	3.500	2.500	0.250	0.312	0.250	1.689	2.514
S-23127	4.000	2.500	0.375	0.375	0.250	2.714	4.039
S-10544	4.000	3.000	0.250	0.375	0.250	1.995	2.969
S-26327	4.000	3.000	0.312	0.312	0.250	2.455	3.654

DIE #	B	H	T	R	R1	LB/FT	KG/M
S-10545	4.000	3.000	0.375	0.375	0.250	2.935	4.368
S-24929	5.000	3.000	0.250	0.375	0.250	2.290	3.408
S-12660	5.000	3.000	0.375	0.438	0.313	3.373	5.019
S-24115	6.000	3.500	0.375	0.375	0.375	4.002	5.956
S-27277	6.000	4.000	0.375	0.500	0.375	4.251	6.327
S-40	6.000	4.000	0.500	0.500	0.375	5.597	8.329
S-25241	6.000	5.000	0.250	0.375	0.250	3.175	4.725