


UNEQUAL LEGS ARCHITECTURAL

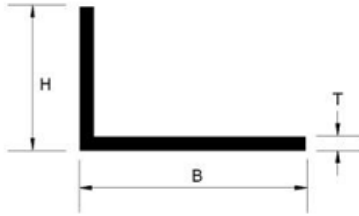

* DENOTES 1/2 COMMERCIAL TOLERANCE

i SPECIAL DIE NOTES, SEE WEBSITE FOR DETAILS

| DIE # | DIMENSIONS | | | WEIGHT | |
|-----------------|------------|-------|-------|--------|-------|
| | B | H | T | LB/FT | KG/M |
| S-5502 i | 0.625 | 0.500 | 0.062 | 0.078 | 0.116 |
| S-2177 i | 0.750 | 0.500 | 0.125 | 0.166 | 0.247 |
| S-6504 | 1.000 | 0.750 | 0.125 | 0.240 | 0.356 |
| S-2243 | 1.500 | 0.750 | 0.125 | 0.313 | 0.466 |
| S-2751 i | 1.500 | 1.000 | 0.055 | 0.159 | 0.236 |
| S-2284 | 1.500 | 1.000 | 0.125 | 0.350 | 0.521 |
| S-2397 | 2.000 | 1.000 | 0.125 | 0.424 | 0.631 |
| SA-00957 | 2.000 | 1.000 | 0.187 | 0.619 | 0.915 |
| S-2286 | 2.000 | 1.500 | 0.125 | 0.498 | 0.740 |
| S-2242 | 2.000 | 1.500 | 0.188 | 0.734 | 1.093 |
| S-2423 | 2.500 | 1.500 | 0.125 | 0.571 | 0.850 |
| S-13664 | 3.000 | 1.000 | 0.125 | 0.571 | 0.850 |
| S-13808 | 3.000 | 2.000 | 0.125 | 0.719 | 1.070 |
| S-2244 | 3.000 | 2.000 | 0.187 | 1.062 | 1.580 |
| S-17185 | 3.000 | 2.000 | 0.250 | 1.401 | 2.085 |
| S-26845 | 3.000 | 2.000 | 0.375 | 2.046 | 3.045 |
| S-5880 | 4.000 | 1.000 | 0.125 | 0.719 | 1.069 |
| SA-00990 | 4.000 | 3.000 | 0.250 | 1.974 | 2.938 |